



SOLA



24m



36m

D-903



1



2



3




4



5



- 1 - TOLVA ABATIBLE. / - FOLDING HOPPER. / - TREMIE RABATTABLE.
- 2 - FONDO TOLVA INOX CON AGITADOR LATERAL. / - STAINLESS-STEEL HOPPER BOTTOM WITH LATERAL AGITATOR. / - FOND DE LA TREMIE EN ACIER INOX AVEC AGITATEUR LATERAL.
- 3 - DEFLECTOR HIDRÁULICO PARA LAS ORILLAS. / - LIMITING FOR EDGE WORKING. / - DEFLECTEUR POUR LES BORDURES.
- 4 - CONTROLADOR ELECTRÓNICO DE LA DOSIS. / - ELECTRONIC CONTROL. / - CONTROLEUR ELECTRONIQUE.
- 5 - CRIBAS SELECTORAS. / - SELECTOR SIEVES. / - TAMIS ANTI GRUMEAUX.

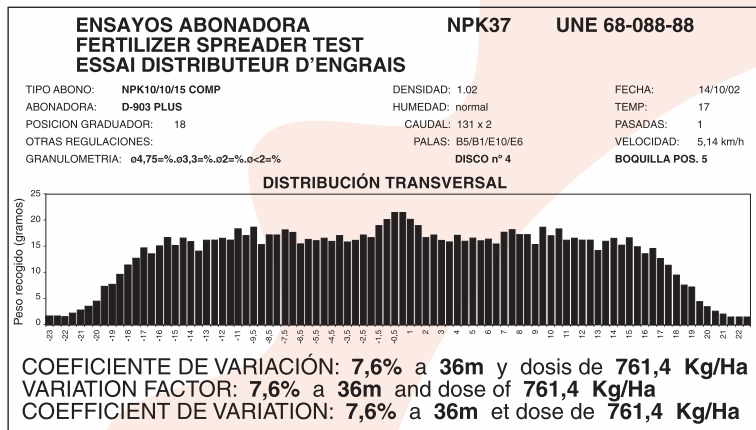

CARACTERÍSTICAS TÉCNICAS / TECHNICAL SPECIFICATIONS / CARACTERISTIQUES TECHNIQUES

| TIPO TYPE TYPE | CAPACIDAD CAPACITY CAPACITE | ANCHO DE TRABAJO WORKING WIDTH LARGEUR DE TRAVAIL |
|----------------------|-----------------------------------|---|
| D-903/1000 | 1.000 l. | 15 - 24 m. |
| D-903/1200 | 1.200 l. | 15 - 24 m. |
| D-903/1500 | 1.500 l. | 15 - 24 m. |
| D-903/2000 | 2.000 l. | 15 - 24 m. |
| D-903-PLUS/1000 | 1.000 l. | 30 - 36 m. |
| D-903-PLUS/1200 | 1.200 l. | 30 - 36 m. |
| D-903-PLUS/1500 | 1.500 l. | 30 - 36 m. |
| D-903-PLUS/2000 | 2.000 l. | 30 - 36 m. |